

FIGHTER 1024.

4X2 / 6-SP **MANUAL** / R.WHEEL PARK BRAKE

GVM

10,400KG

GCM

20,000KG

Power/Torque

177KW/745NM

Medium rigid licence required.



5
YEAR WARRANTY

CLASS LEADING 30,000KM SERVICE INTERVALS.

fuso.com.au

FUSO

SPECIFICATIONS

MODEL

- A
- 4x2 1024 Rear Wheel Park Brake SWB 6 Sp. MAN (FK61FH1RFAC)
- B
- 4x2 1024 Rear Wheel Park Brake MWB 6 Sp. MAN (FK61FK1RFAC)
- C
- 4x2 1024 Rear Wheel Park Brake LWB 6 Sp. MAN (FK61FL1RFAC)
- D
- 4x2 1024 Rear Wheel Park Brake XLWB 6 Sp. MAN (FK61FM1RFAC)

WHEEL BASE

- 4270mm
- 4870mm
- 5210mm
- 5540mm


GVM (optional)

- 10,400kg
- 10,400kg
- 10,400kg
- 10,400kg

GCM (optional)

- 20,000kg
- 20,000kg
- 20,000kg
- 20,000kg

ENGINE	
Engine Version	FUSO 6M60-9AT1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7545cc)
Bore	118mm
Stroke	115mm
Power (ECE R85-00)	177kW @ 2500 rpm
Torque (ECE R85-00)	745Nm @ 1400 rpm
Maximum Engine Speed	2900 rpm
Compression Ratio	16.0:1
Cooling System / Oil Cooler	Water cooled, 23.0L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Selective Catalytic Reduction (SCR) after-treatment system (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	ADR 80/03 - Euro 5

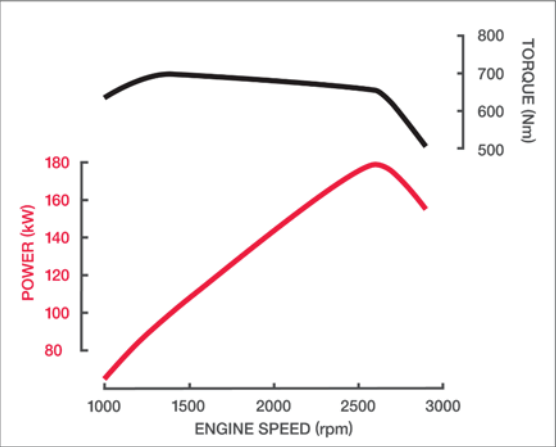

FUEL	
Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	200 Litres
AdBlue Exhaust Fluid Capacity	22 Litres
Notes	*Max Fill to approx 95% of Air Capacity

COOLING	
Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

ELECTRICAL	
Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Starter Capacity	24V-5.0kW
Battery Capacity	2x12V, 65Ah/5hr
Headlamp Type	Halogen
Headlamp Capacity	Low Beam 2x70W High Beam 2x75W

CLUTCH	
Clutch Model	FUSO C7M38
Type	Single Dry Plate
Operation/Specification	Air Assisted Hydraulic

TRANSMISSION	
Version	FUSO Manual M070S6-OD
Type/Speeds	6 with Air Assisted Gearshift
Features	Synchromesh 2nd-6th
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504 5th: 1.000 6th: 0.774 Rev. 6.807
PTO Opening	LH Side

PROPELLER SHAFT	
Type	P10
Universal Joint	Needle Roller

FRONT AXLE	
Axle Version	FUSO F400T
Type	Reverse Elliot 'I' Beam
Capacity *	3800kg
Notes	*See MAX LOADING for vehicle capacity.

FRONT SUSPENSION	
Type	Parabolic Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size	1300x70mm Leaves

REAR AXLE	
Type	Full Floating Hypoid
Axle Version	FUSO R052T/D052H
Capacity*	9500kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

REAR SUSPENSION	
Type	Steel Suspension
Details	Semi-Elliptic Leaf with Stabiliser Bar
Size Main Leaves	1300x70mm
Size Helper Leaves	900x70mm

MAX LOADING	
Front	3800kg
Rear	6800kg
Total	10400kg

OPTIONS	
Options	R01 (FK61FH only): Engine Flywheel PTO Max. Output Torque, 300Nm Drive Ratio, 0.635:1 Rotation, Same as Engine R02 (FK61FH only): Limited Slip Differential (LSD)

SPECIFICATIONS

MODEL

A	4x2 1024 Rear Wheel Park Brake SWB 6 Sp. MAN (FK61FH1RFAC)
B	4x2 1024 Rear Wheel Park Brake MWB 6 Sp. MAN (FK61FK1RFAC)
C	4x2 1024 Rear Wheel Park Brake LWB 6 Sp. MAN (FK61FL1RFAC)
D	4x2 1024 Rear Wheel Park Brake XLWB 6 Sp. MAN (FK61FM1RFAC)

WHEEL BASE

4270mm
4870mm
5210mm
5540mm

GVM (optional)

10,400kg
10,400kg
10,400kg
10,400kg

GCM (optional)

20,000kg
20,000kg
20,000kg
20,000kg

STEERING

Type	Integral Power Assisted Ball and Nut
Steering Column	Tilt/Telescopic Adjustable with Lock
Ratio	17.1~20.0:1

BRAKES

Type	Air Actuated Hydraulic Dual Circuit ABS with Automatic Brake Adjustment
Size Front	320x120mm
Size Rear	320x140mm
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cyl.
Air Dryer Model	DU3

WHEELS & TYRES

Wheel Type	7, Single Piece Disc
Wheel Size	17.5x6.75DC-131-10t
Wheel Stud Pattern	6x222.25mm PCD
Tyre Size All	235/75R17.5LT 132/130M
Spare Tyre Carrier	Provided

CHASSIS

Type	Parallel Channel
Size	228x80x7.0mm
Width	842mm
Tensile Strength	540Mpa

INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Air Pressure (2) Fuel Level Water Temperature
Colour Information Display	Fuel Consumption Service Indicators Hour Meter and Tripmeter
Warning Lamps	ABS Turn Signal High Beam Exhaust Brake Hill Start Assist Oil Level Ad Blue Low Fuel Low Park Brake Alternator Oil Filter Blockage Engine Control / Cruise Control (ECU) Air Filter Restriction Fuel Filter Water Contamination Door Opening
Warning Lamp/Buzzer	Air Pressure Brake Fluid Level / Dual Circuit Oil Pressure Engine Overheat / Low Coolant Level

MULTI-MEDIA PACKAGE

Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	6.1 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	CD/DVD player and Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB port for iPod®* & other devices
Reversing Camera	Display can accept up to 3 cameras#
Compatible	
Notes	* iPod® compatibility requires an additional licensed cable # Cameras available through spare parts

STANDARD FEATURES

Airbag(s)	Driver's Air Bag and Seat Belt Pre-tensioners
Hill Start System	Yes
Cab Cooling & Heating	Air Conditioner / Heater / Demister
Accessory Power	24V Accessory Power Outlet / Cigar Lighter
Driving	Keyless Central Locking Electric Windows Cruise Control LH Transom Window Fuso Multimedia Unit Cup Holders (4) Rear Quarter Glass Fluorescent Cabin Lamp and Interior Reading Lamps Engine Idle Speed Control
Storage	Centre Seat Storage Console Rear Bunk Storage Pocket Dash Storage Tray 2 DIN Glove Compartment 1 Single & 1 Double DIN Slot for Accessories Overhead Storage Pocket with Lid RH Door Storage Pocket
Cab: External	Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps
Chassis	Chassis Mounted Tool Box Reverse Warning Buzzer

CAB FEATURES

Type	All Steel Forward Control Manual Tilt 44 deg.
Mounting	Hydroelastic Susp. 4 Point
Colour	Natural White
Interior	Fully Trimmed
Windscreen	Laminated Tinted
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door	90 degree Opening Angle
Rear Vision Mirrors	Remote / Heated with Convex Spotter (Both Sides)
Seating Capacity	3
Seat Belts	2 ELR Lap Sash, 1 Lap
Seat (driver)	ISRI Air Suspension with Height, Tilt and Dampening Adjustment Integral Headrest and Fabric Trim
Seats (passenger)	Centre: Low Back with Fabric Trim Forward Folding Far Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim

SERVICE INTERVALS

Interval*	30,000km, 12 Months or 600 Hours (whichever occurs first)
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

SPECIFICATIONS

MODEL

A	4x2 1024 Rear Wheel Park Brake SWB 6 Sp. MAN (FK61FH1RFAC)
B	4x2 1024 Rear Wheel Park Brake MWB 6 Sp. MAN (FK61FK1RFAC)
C	4x2 1024 Rear Wheel Park Brake LWB 6 Sp. MAN (FK61FL1RFAC)
D	4x2 1024 Rear Wheel Park Brake XLWB 6 Sp. MAN (FK61FM1RFAC)

WHEEL BASE

4270mm
4870mm
5210mm
5540mm

GVM (optional)

10,400kg
10,400kg
10,400kg
10,400kg

GCM (optional)

20,000kg
20,000kg
20,000kg
20,000kg

WARRANTY

Basic/Powertrain	5 Years, 300,000kms or 6,000 operating hours (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years

PERFORMANCE

	A	B	C	D
Turning Circle (kerb to kerb - metres)	13.8	15.6	16.6	17.4
Road Speed (km/h) at Max Engine Speed	123	123	123	123
Engine Speed (rpm) at 100km/hr (top gear)	2327	2327	2327	2327
Gradeability at Rated GVM (theoretical)*	54%	54%	54%	54%
Gradeability at Rated GCM (theoretical)*	24%	24%	24%	24%

Notes *This is theoretical performance only. Actual performance may vary under different conditions

MASS (ESTIMATED)*

	A	B	C	D
Front*	2240kg	2260kg	2285kg	2295kg
Rear*	1265kg	1280kg	1325kg	1330kg
Total*	3505kg	3540kg	3610kg	3625kg

Notes * Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)

DIMENSIONS (MM)

	A	B	C	D
Width Front Fender (mm)	2170	2170	2170	2170
Width Rear Axle (mm)	2175	2175	2175	2175
Width Front Track (mm)	1810	1810	1810	1810
Width Rear Track (mm)	1665	1665	1665	1665
Width Frame (mm)	842	842	842	842
MAX. RECOMMENDED BODY WIDTH (mm)	2500	2500	2500	2500
A - Length Overall (mm)	7220	8095	8645	9075
C - Front Overhang (mm)	1135	1135	1135	1135
D - Wheelbase (mm)	4270	4870	5210	5540
G - Front Axle to Rear of Cab (mm)	855	855	855	855
H - Rear of Cab to Rearmost Item Behind Cab (mm)	130 / 185*	130	130	130
I - Rearmost Item Behind Cab to Rear Axle (mm)	3285	3885	4225	4555
J - Frame, Rear Axle to End (mm)	1815	2090	2300	2400
P - Height Cab to Ground (mm)	2465	2465	2465	2465
Q - Height Cab to Frame (mm)	1669	1669	1669	1669
R - Height Rear Frame to Ground (mm)	862	861	861	860


BODY BUILDER'S NOTES

Notes

Chassis reinforcement must be utilised for Tipper/Demountable type body configurations. To conform with ADR 13/00 and 14/02 (lighting/mirror requirements) the following must be adhered to at body installation.

- If other than a flat type or tipper body is fitted, rear end out-line marker lamps must be installed.
- If overall length exceeds 6.0 metres, side reflectors must be installed.
- If overall length exceeds 7.5 metres, side marker lamps must be installed.
- If overall width is less than 2.4 metres, the mirrors must be modified to project not more than 230mm.

To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.

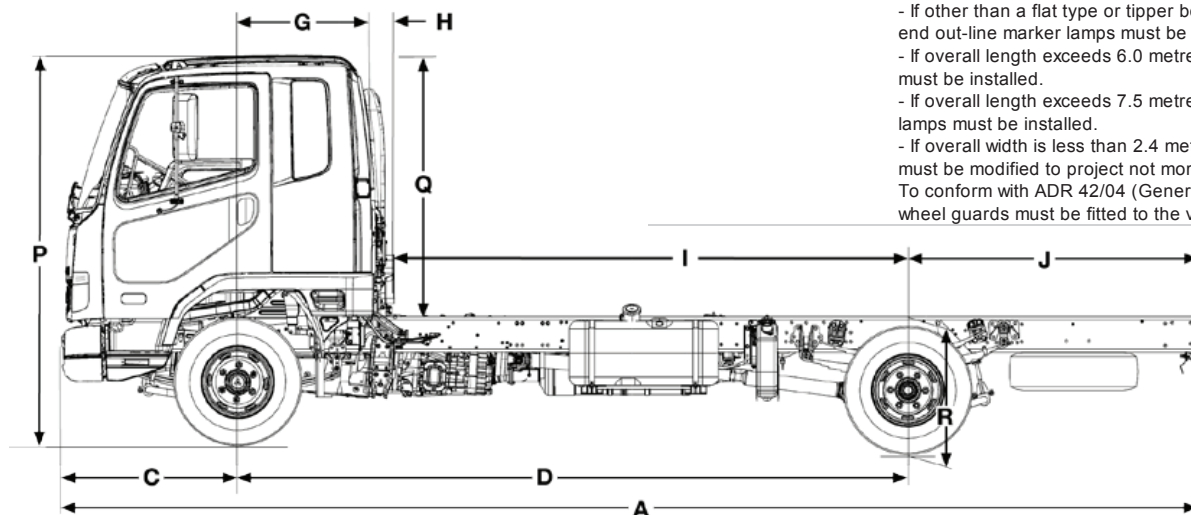

CALL 1300 429 134

or visit fuso.com.au

FUSO

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this document are for illustration purposes only and may not be available from Mercedes-Benz Australia/Pacific Pty Ltd (ABN 23 004 411 410) ("MBAuP"). No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than MBAuP. MBAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from MBAuP please contact your authorised Mitsubishi FUSO truck and bus dealer. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © MBAuP. Reproduction in whole or part prohibited without written approval. Part Number TSF32F-SSV2. Valid from 01-Mar-17.